


THE SHERBORNE RUBBER COMPANY LTD

Double-D-Fender ECONOMICAL RUB RAIL & Accessories


Made of tough, durable Neoprene it absorbs the shock of impacts, whereas metal or wooden rub rails transmit the shock. The original 'Double-D Fender' can be successfully used on ambulances, furniture vans (inside or outside), caravans, garage walls, boat gunwhales (river or sea-going), super-market display units and check-outs, factory bays and loading trolleys, etc. etc.

Corner and end moulding supplied to give wrap around protection.


(corner moulding only available for SRD 105)

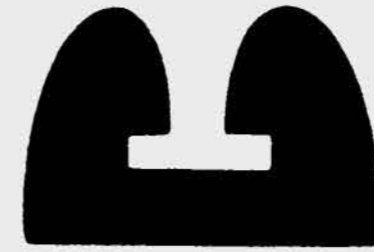

SRD 101

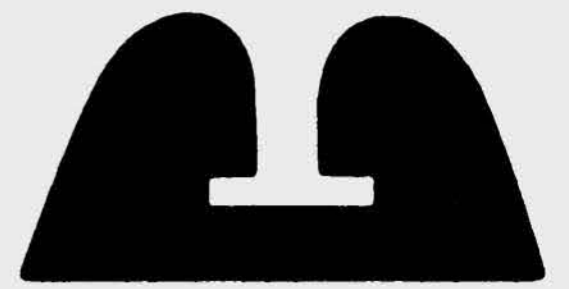


SRD 102

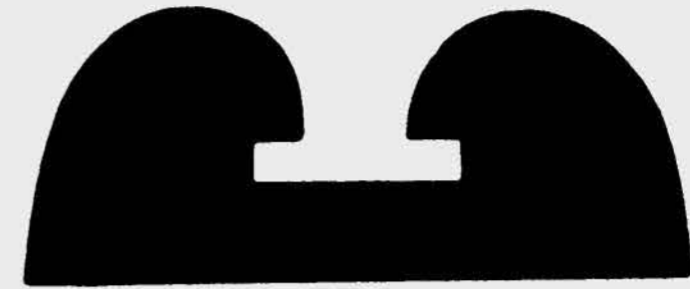

SRD 103




SRD 103

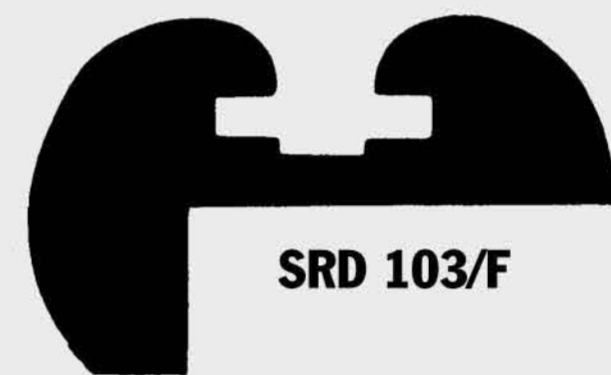


SRD 103/F




SRD 105/S

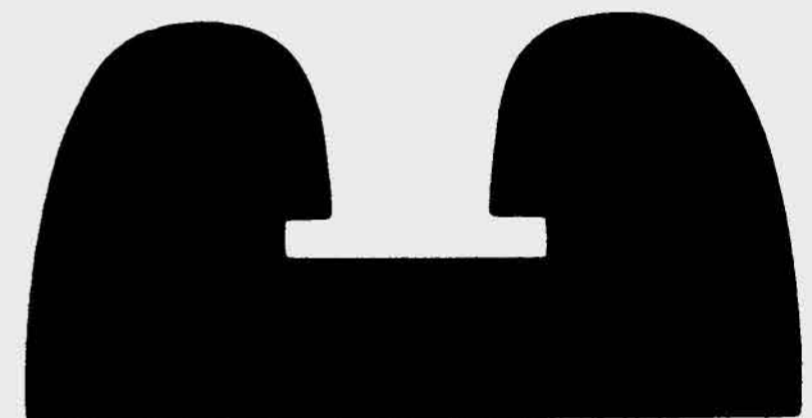

SRD 104

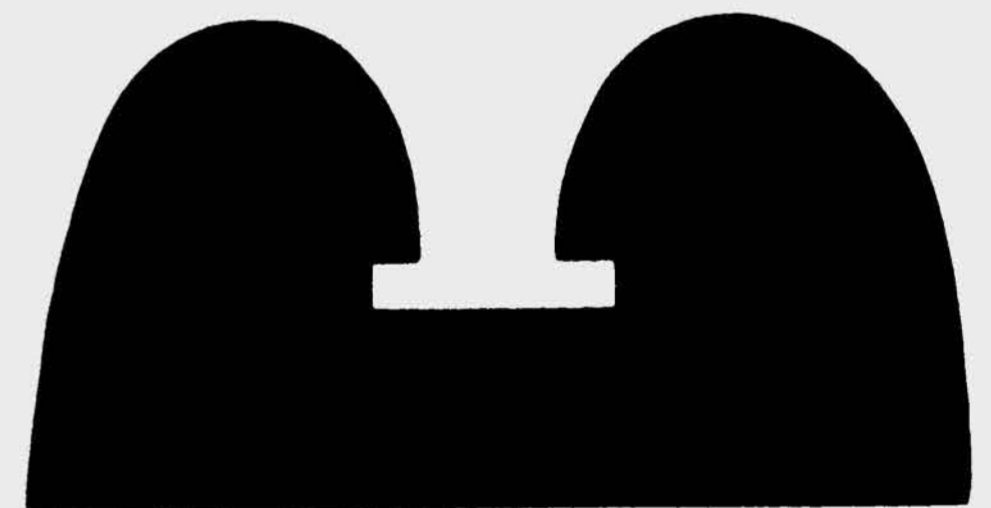

SRD 105

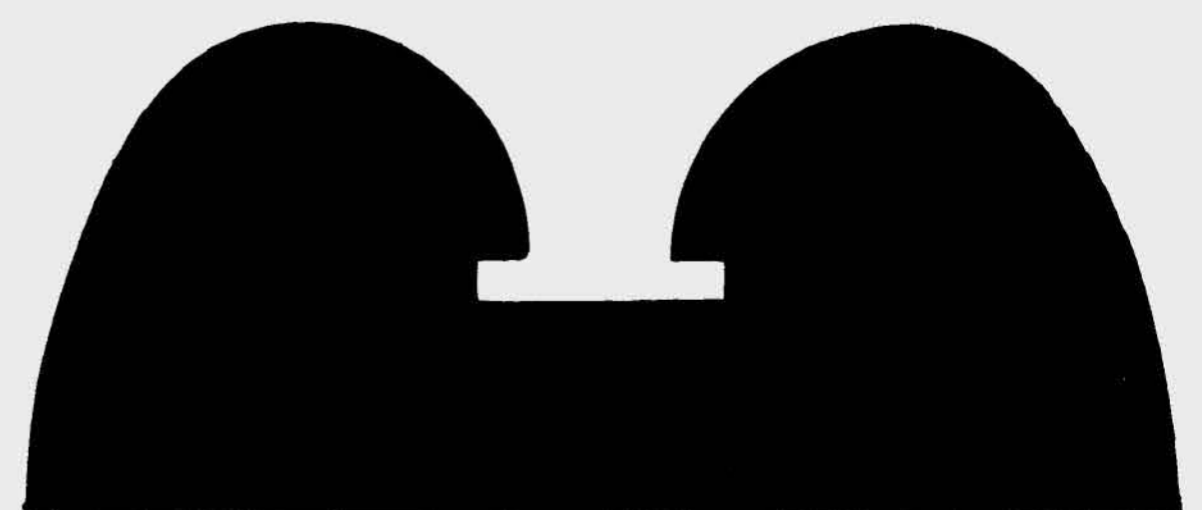

SRD 106

THE SHERBORNE RUBBER COMPANY LTD

Manufacturers of Rubber Mouldings, Rubber-to-Metal Bondings, Extrusions, Fabrications and Assemblies, Bespoke Mouldings, Rubber Tyres, Rubba Guys, Fendering and Buffer strips

Crown Works, Baltimore Road, Perry Barr, Birmingham B42 1DP

Tel: +44 (0)121 356 5628 Fax: +44 (0)121 356 4583

email: sales@sherborne.co.uk www.sherborne.co.uk

Product Information Sheet

RUBBER FENDERING AND ACCESSORIES

Sherborne Double-D-Fender

Supplied complete with 18/8 Stainless Steel retaining strip punched and fitted

Reference	Fender Section		Stainless steel strip 18/8			Fender coil length	
	mm	inches	Width		Gauge	metres	feet
SRD.101	22x14	7/8" x 9/16"	8.0	5/16"	22 gauge	36.576	120
SRD.102	32x16	1.1/4" x 5/8"	9.5	3/8"	22 gauge	30.480	100
SRD.103F	38x19	1.1/2" x 3/4" max.	13.0	1/2"	22 gauge	24.384	80
SRD.103A	38x13	1.1/2" x 1/2"	13.0	1/2"	22 gauge	36.576	120
SRD.103	44x19	1.3/4" x 3/4"	13.0	1/2"	22 gauge	30.480	100
SRD.104	51x25	2" x 1"	16.0	5/8"	22 gauge	18.288	60
SRD.105	60x32	2.3/8" x 1.1/4"	16.0	5/8"	22 gauge	12.192	40
SRD.105S	60x14	2.3/8" x 9/16"	19.1	3/4"	22 gauge	30.480	100
SRD.106	76x32	3" x 1.1/2"	16.0	5/8"	22 gauge	12.192	40

Accessories

	Plastic insert (limited availability)				Stop end mouldings available?	Corner moulding available?
	Width		Coil length			
	mm	inches	metres	feet		
To suit SRD.102					Yes	
To suit SRD.103F	13.0	1/2"	30.480	100		
To suit SRD.103A	13.0	1/2"	30.480	100	Yes	
To suit SRD.103	13.0	1/2"	30.480	100	Yes	
To suit SRD.104	16.0	5/8"	30.480	100	Yes	
To suit SRD.105	16.0	5/8"	30.480	100	Yes	Yes
To suit SRD.105S	19.0	3/4"	30.480	100		
To suit SRD.106	16.0	5/8"	30.480	100		

Notes:

RUBBER: (Extrusion & Stop-End Mouldings)
Chloroprene (neoprene) polymer 70° IRHD available in BLACK or GREY.

STAINLESS STEEL:

18/8 Stainless Steel: 22 gauge 0.7mm thick. (Heavy Duty steel also available at 1.5mm thick) Double-D-Fender is supplied complete with stainless steel retaining strip punched and fitted.

Countersunk steel is supplied for all sizes except SRD.101 and SRD.102. Countersunk holes are designed to take No: 8 screws, alternatively bolt or rivet. Hole centres 75mm (3 inches) approx.

SRD.101 and SRD.102 may be fitted with either screw or nail dependant upon application.

Stainless steel screws are recommended to be fitted with our stainless steel retaining strip.

CORNER MOULDINGS:

Designed to protect 90° corners externally; this assembly comprises two interlocking halves supplied loose.

We would be pleased to quote for custom-made extrusions and mouldings designed to meet your requirements. Please contact us for details.